




Plot no: 23, P O box. No: 86
Village: Kisemvule, Region: Pwani
District: Mkuranga, City: Dar es salaam
Country: Tanzania

www.rhynopolyplast.com
info@rhynopolyplast.com

+255 754972651 | +255 767787131



Certificate no: 773

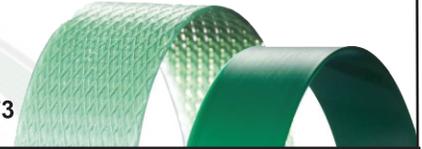

COTTON BALE TIE WIRE



Specification:

Material: Galvanized High Strength Steel Wire.

Surface: Galvanized (hot-dip or electro).

Tensile Strength: 1400-1700 N/mm² or
as per client request.

Diameter: 2.00 mm to 4.00 mm.

Bale ties length 2.1 meters to 4.5 meters.

Breaking Load at loop: 975 to 1050 kg mini.

Package: within lengthwise bundles. Well wrapped &
protected. 100 pcs/Bundle, 22 Tons/20ft container.

Uses: Quick link bale ties for packaging all types of
expanding fibrous material cotton, synthetic fiber,
wool, waste, etc.

It is suitable for hand tying and automated systems.